

# 深圳市晨木实业有限公司


## SHENZHEN CHENMU INDUSTRY CO., LTD.

深圳市龙华区福城街道大水坑社区一村 300 号沃特思厂房 5 栋 2 楼

[Http://www.chenmubattery.com](http://www.chenmubattery.com)

## Cell Type CR123A

### Specifications

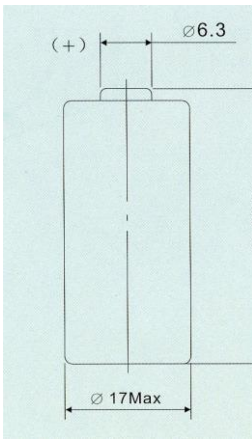

Nominal capacity		1300mAh
Nominal voltage		3v
Standard Discharge current		10mA
Max. Discharge current	continuous	1500mA
	pulse	2500mA
Temperature Range		-40°C - 60°C
Weight		17
Dimensions		D
		H
		d

- 1 Nominal capacity is determined to an end voltage of 2.0v when the battery is allowed to discharge at a standard current level at 23°C
- 2 Current value is determined to be the level at which 50% of the nominal capacity is obtained with an end voltage of 2.0V at 23°C
- 3 Current value obtaining 2.0v cell voltage when pulse is applied for 15 seconds at 50% discharge depth at 23°C


Typical Character

# 深圳市晨木实业有限公司


## SHENZHEN CHENMU INDUSTRY CO., LTD.

深圳市龙华区福城街道大水坑社区一村 300 号沃特思厂房 5 栋 2 楼


[Http://www.chenmubattery.com](http://www.chenmubattery.com)

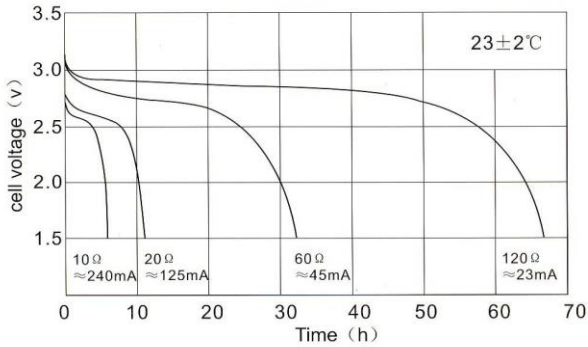

常温负载特性  
Discharge Characteristics

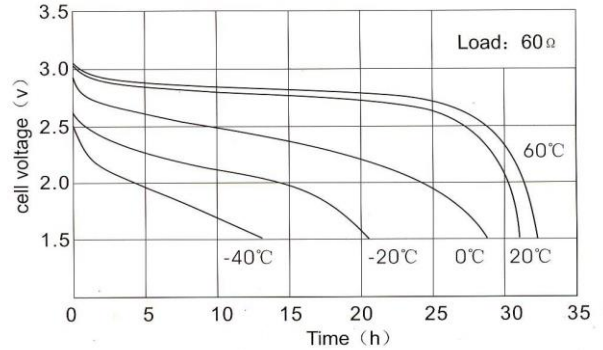

温度特性  
Temperature Characteristics

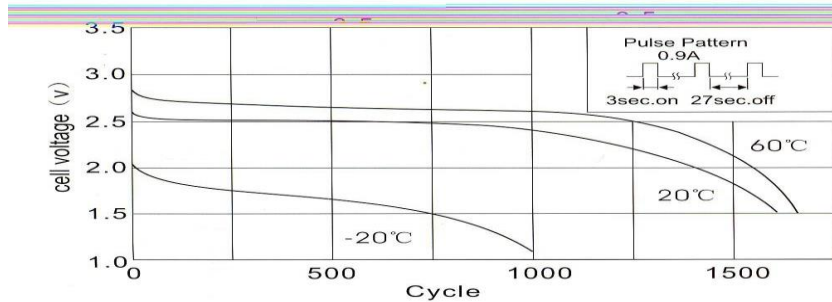

脉冲放电特性  
Load-Capacity Characteristics